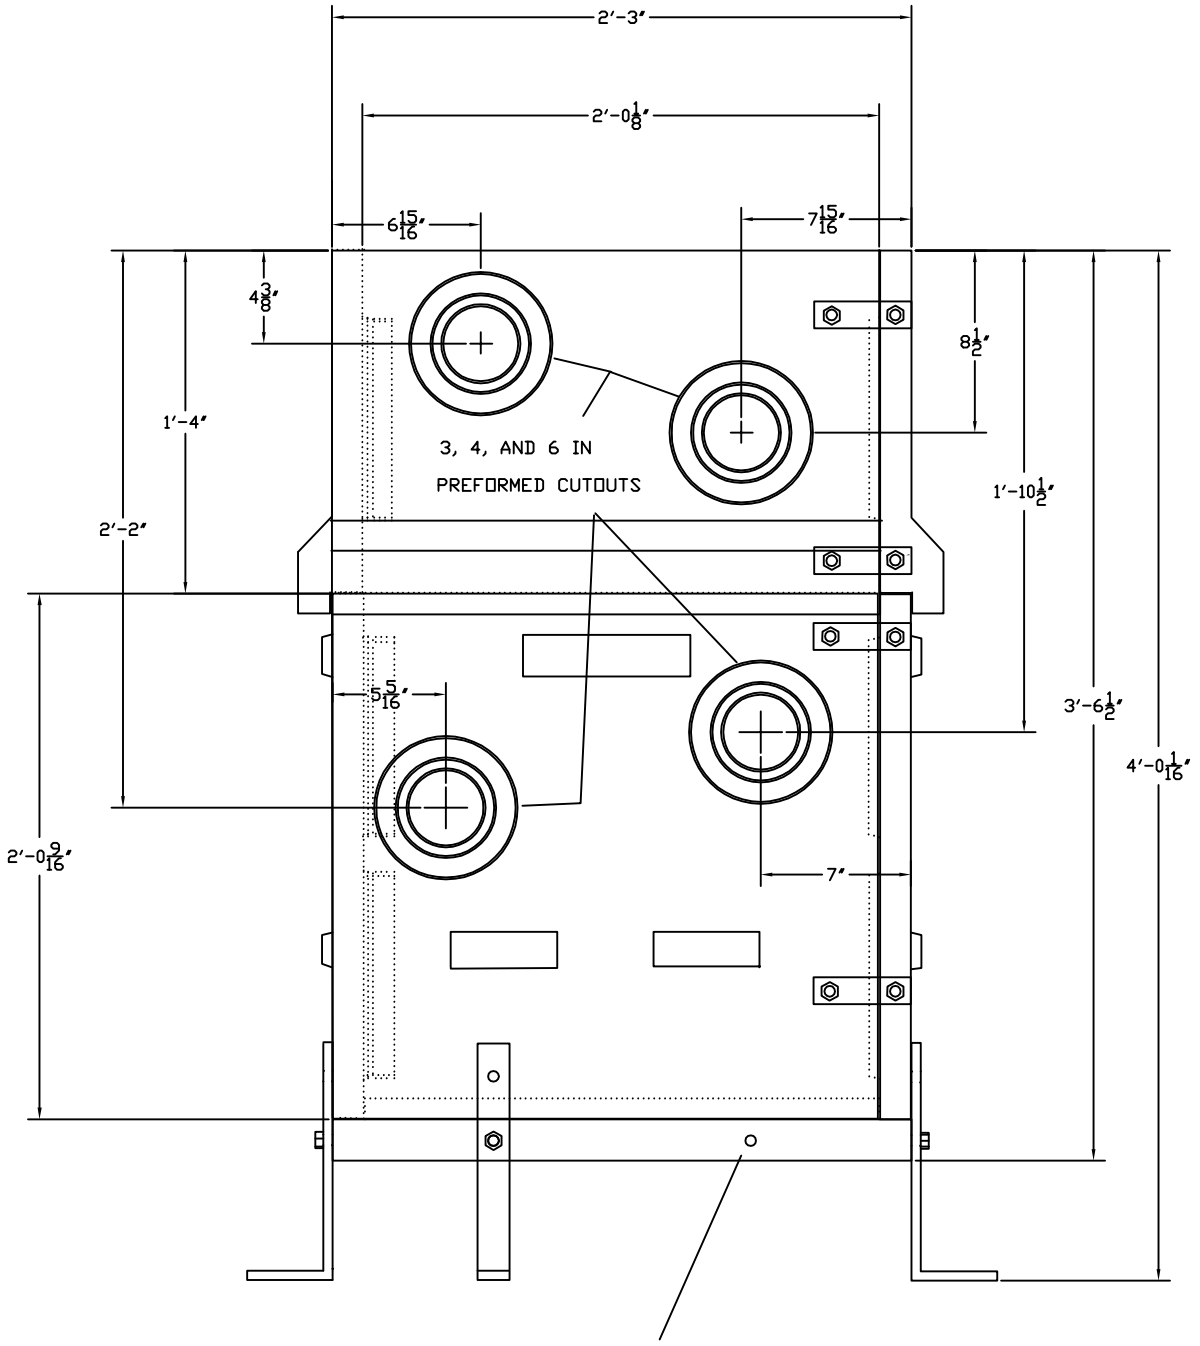

OPTIONAL INSERT FOR USE WITH 8 INSTALLATION FEET

NOTE:

FRAME AND GRATE COVER REQUIRED

ALL FASTNERS ARE 0.5 IN DIA. X 1.5 IN HEX HEAD BOLTS UNLESS OTHERWISE NOTED

ALL SAND TRAPS ARE ORIGINALLY EQUIPPED WITH FOUR (4) INSTALLATION SUPPORTS . AN ADDITIONAL FOUR (4) SUPPORTS MAY BE ADDED FOR INSTALLATION IN POOR SUBGRADE SUPPORT SITUATIONS

ALL PREFORMED CUTOUTS ARE FOR SCHEDULE 40 PIPE

ABT, INC.
POLYDRAIN® TRENCH FORMER®
P.O. BOX 837, 259 MURDOCK ROAD
TROUTMAN, NC 28166
(704) 528-9606

TITLE:	POLYDRAIN #625 SAND TRAP		
DRAWN BY:		CHECKED BY:	DRAWING NUMBER: C- ST-625
SCALE: NONE	DATE: 08/21/03		

Proprietary rights of ABT, Inc. are included in the information disclosed herein. The recipient, by accepting this document, agrees that neither this document nor the information disclosed herein nor any part thereof shall be copied, reproduced or transferred to others for manufacturing or for any other purpose except as specifically authorized in writing by ABT, Inc..

DISCLAIMER: The customer and the customer's architects, engineers, consultants and other professionals are completely responsible for the selection, installation, and maintenance of any product purchased from ABT, and EXCEPT AS EXPRESSLY PROVIDED IN ABT'S STANDARD WARRANTIES, ABT MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMER'S APPLICATION. Copies of ABT's standard warranties are available upon request.